




ED-Ring

뛰어난 탄성력, 낮은 마찰계수로
탁월한 기술력을 선보입니다

ED-Ring General Information

This elastomer seal is used as an axial static seal for threaded ports and stud ends in hydraulic fluid power applications in accordance with DIN 3869, ISO 9974 and ISO 1179.

The cross-section remains practically constant even under high pressure. The groove dimensions are in accordance with DIN 3852 part 11.

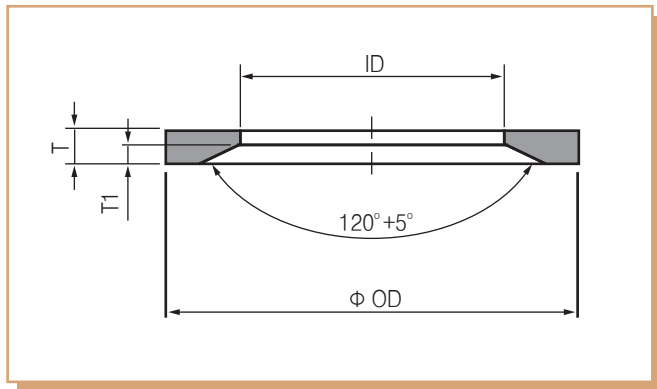

Advantages

- Minimal mechanical deformation of the cross-section
- Outstanding sealing behaviour over long periods
- No twisting in the groove
- No relative movements during pressure cycles
- Dimensionally stable under pressure
- High leak tightness compared to metal / metal sealing

Size [ΦID X ΦOD X T X T1]	THREAD
6.5 X 9.9 X 1.0 X 0.5	M 8 X 1
8.4 X 11.9 X 1.0 X 0.5	G 1/8 A
9.8 X 14.4 X 1.5 X 0.8	M 12 X 1.5
11.6 X 16.5 X 1.5 X 0.8	G 1/4 A
13.8 X 18.9 X 1.5 X 0.8	M 16 X 1.5
14.7 X 18.9 X 1.5 X 0.8	G 3/8 A
15.7 X 20.9 X 1.5 X 0.8	M 18 X 1.5
17.8 X 22.9 X 1.5 X 0.8	M 20 X 1.5
18.5 X 23.9 X 1.5 X 0.8	G 1/2 A
19.6 X 24.3 X 1.5 X 0.8	M 22 X 1.5
23.9 X 29.2 X 1.5 X 0.8	G 3/4 A
29.7 X 35.7 X 2.0 X 1.0	G 1 A
38.8 X 45.8 X 2.0 X 1.0	G 1 1/4 A
44.7 X 50.7 X 2.0 X 1.0	G 1 1/2 A

Profil Sealing Rings : DIN 3869

Guarnizioni in Gomma : DIN 3869

Profildichtringe : DIN 3869

Application examples in hydraulic components such as:

- Injection molding machines
- Machine tools
- Presses
- Excavators
- Agricultural machines
- Valves for hydraulic circuits



대양메카닉스

<http://www.dymseal.com>
e-mail: sales@dymseal.com

대양메카닉스 본사/공장
서울시 동대문구 용두동 236-9

대양메카닉스 무역사업소
서울시 금천구 가산동 60-44
이앤씨드림타워 7차 304, 305호
Tel. 02-2676-9192
Fax. 02-2671-4369

대양메카닉스 구로영업소
서울시 구로구 구로동
구로공구상가 D-27-118호
Tel. 02-2634-2941
Fax. 02-2636-5369

대양메카닉스 종로영업소
서울시 종로구 장사동 214
Tel. 02-2276-0959
Fax. 02-2276-0951

